


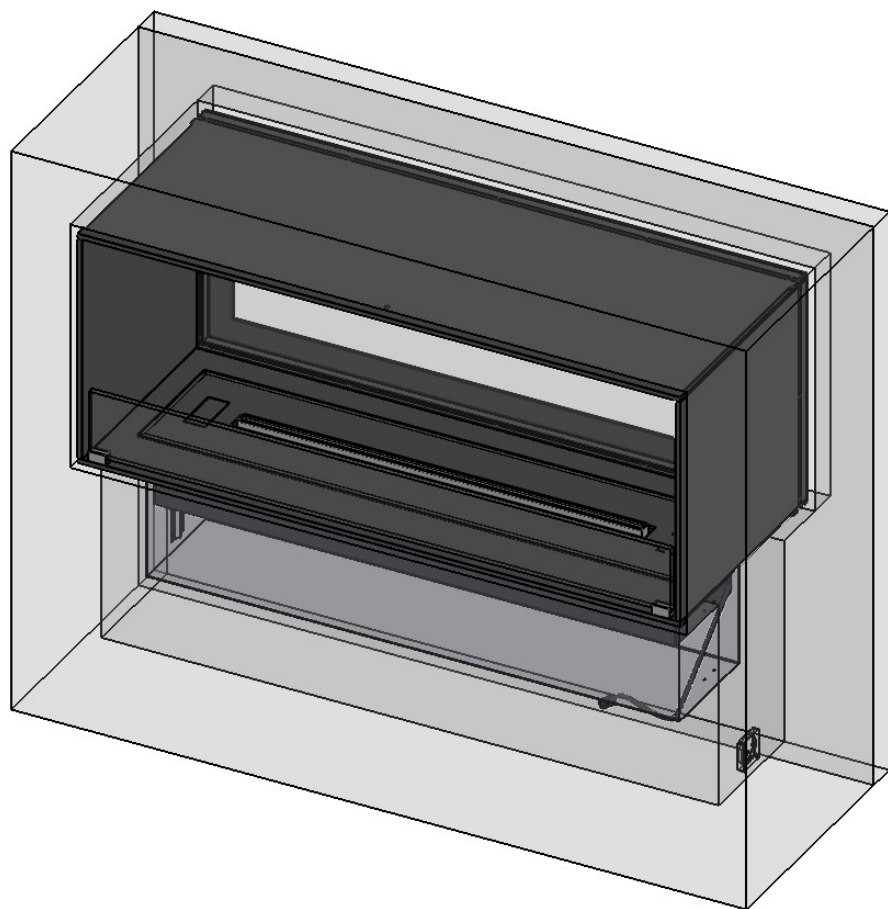

DK - VARENR.
UK - ITEM NO.

53102

DK - Montreal CLEAR

decoflame® Montreal Denver F6 920 - Glas monteret på pejseindsats
Pejs (LxHxD) 1020x400x408mm, Sort
Hulmål inkl. finish* (LxHxD) "1044x424x408mm"
Aluminiums brænderør 700mm
Kontrolpanel, Fjernbetjening, Bluetooth / App & 6 flammetrin inkl. ECO Wave
Inderside: Frontglas 110 mm høj, Yderside: 3-lags termoglas

BLUETOOTH CODE:

REKV. NO. :

UK - Montreal CLEAR

decoflame® Montreal Denver F6 920 - Glass mounted on fireplace casing
Fireplace casing (LxHxD) 1020x400x408mm, Black
Wall cutout incl. finish* (LxHxD) "1044x424x408mm"
Aluminium flame tray 700mm
Control Panel, Remote Control, Bluetooth / App & 6 flame levels incl. ECO Wave
Internal side: Front glass 110 mm high, External side: triple-glass thermo glass.

DELIVERY FROM WEEK:

Dimensions in millimeters Page 1 / 7

DecoFlame Aps
Vang Mark 2
9380 Vestbjerg
Denmark
Tlf: +45 9630 4800




bestilling@decoflame.dk

Copyright of DecoFlame ApS Denmark, whose property this document remains. No part thereof may be disclosed, copied, duplicated or in any other way made use of, except with the approval of DecoFlame ApS DecoFlame Denmark.

DK: Tilkøb af ramme
UK: Additional frame

50mm

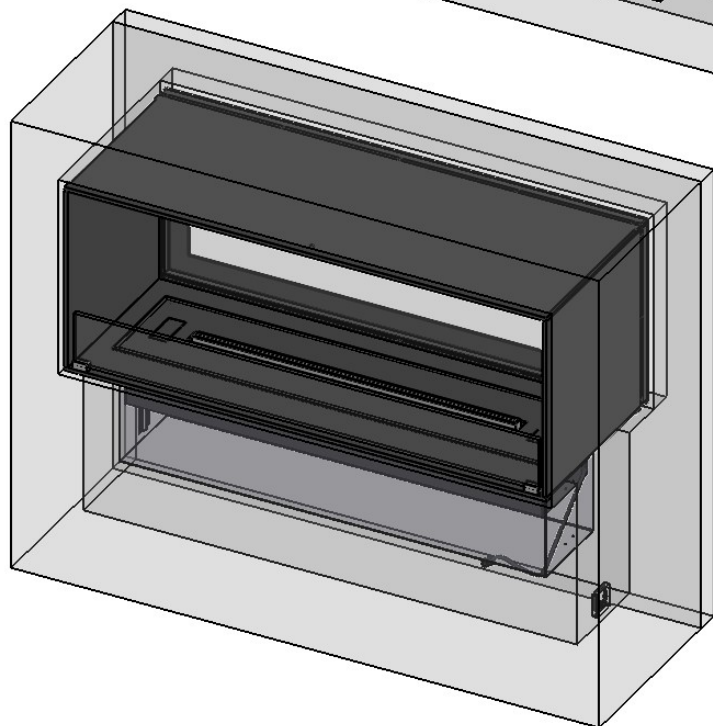

DK: Med ramme
UK: Whit frame



DK: Uden ramme
UK: Whitout frame



DK - VARENR.
UK - ITEM NO.

53102

DK - Montreal CLEAR

decoflame® Montreal Denver F6 920 - Glas monteret på pejseindsats
Pejs (LxHxD) 1020x400x408mm, Sort
Hulmål inkl. finish* (LxHxD) "1044x424x408mm"
Aluminiums brænderør 700mm
Kontrolpanel, Fjernbetjening, Bluetooth / App & 6 flammetrin inkl. ECO Wave
Inderside: Frontglas 110 mm høj, Yderside: 3-lags termoglas

UK - Montreal CLEAR

decoflame® Montreal Denver F6 920 - Glass mounted on fireplace casing
Fireplace casing (LxHxD) 1020x400x408mm, Black
Wall cutout incl. finish* (LxHxD) "1044x424x408mm"
Aluminium flame tray 700mm
Control Panel, Remote Control, Bluetooth / App & 6 flame levels incl. ECO Wave
Internal side: Front glass 110 mm high, External side: triple-glass thermo glass.

Dimensions in millimeters Page 2 / 7

Decoflame Aps
Vang Mark 2
9380 Vestbjerg
Denmark
Tlf: +45 9630 4800

decoflame

bestilling@decoflame.dk

Copyright of Decoflame Aps Denmark, whose property this document remains. No part thereof may be disclosed, copied, duplicated or in any other way made use of, except with the approval of Decoflame Aps Decoflame Denmark.

BLUETOOTH CODE:

REKV. NO. :

DELIVERY FROM WEEK:

**DK - Færdige hulmål
(LxHxD) 1044x424x408mm inkl. finish***




Finish*: Væv, spartel, maling etc.

Være opmærksom: Fjern mørtelrester og sikre korrekt hulmål

**UK - Finished wall cutout
(LxHxD) 1044x424x408mm incl. finish***

Finish*: Tissue, filler, painting etc.

Attention: Remove any mortar residue and ensure a correctly dimensioned hole.

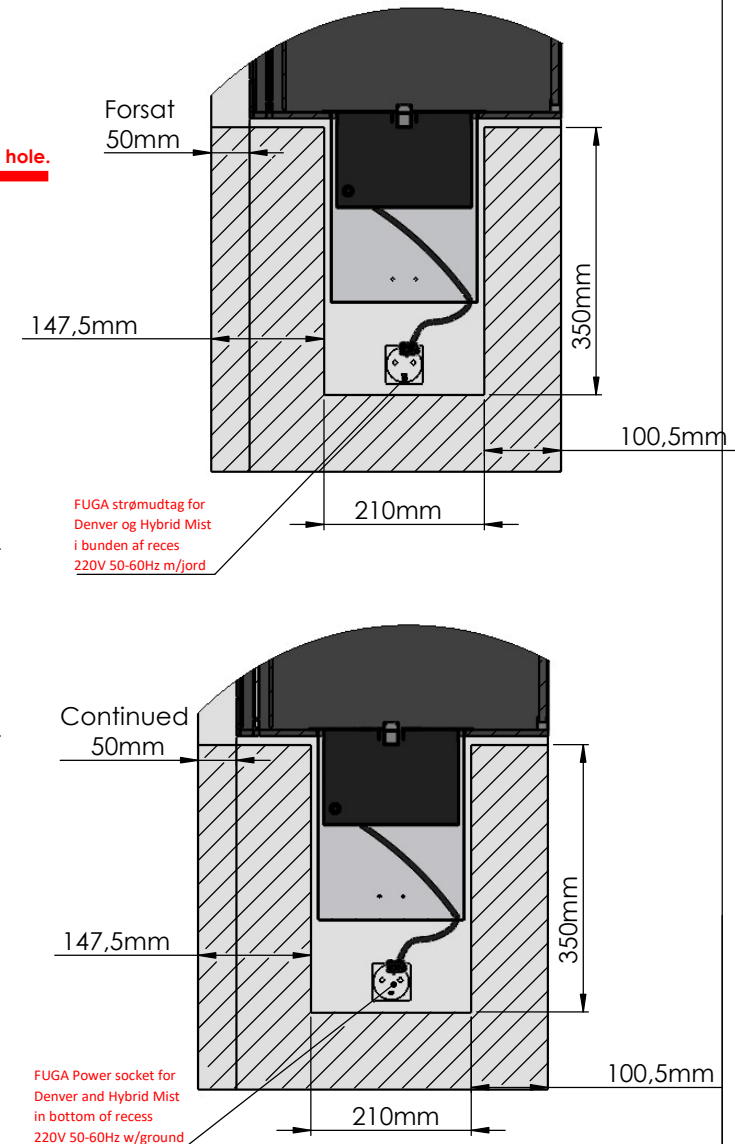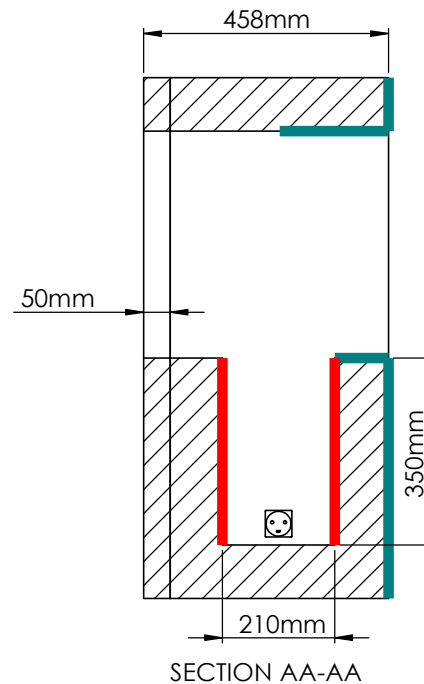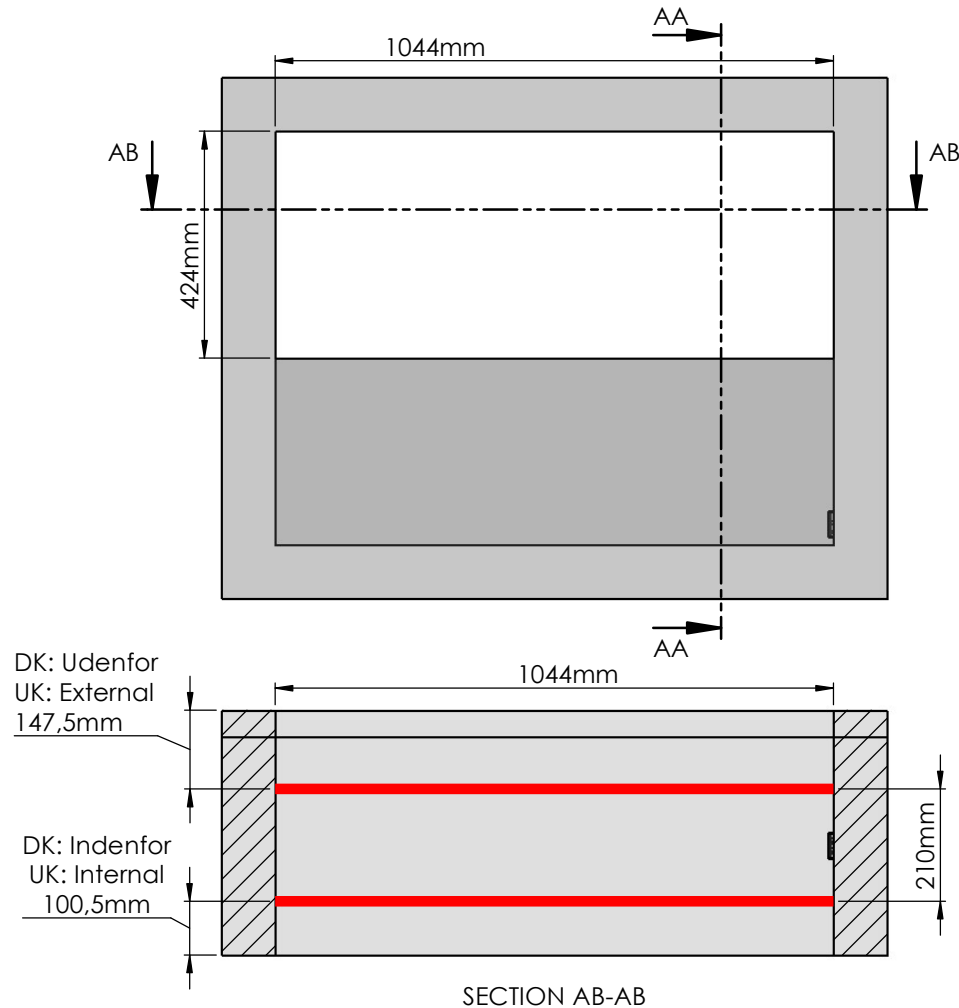

DK - VARENR.
UK - ITEM NO.

53102

DK - Vigtigt

- Vi anbefaler at lave reces/udsparring i væg ned til gulvet = Fremtidssikret til alle Decoflame brændere.
- Hulsten må ikke bruges som øverste skift.

UK - Important

- We recommend to make the wall recess down to the floor. = future-proofed for all Decoflame fireplaces.
- The hollow stone must not be use as upper shift.

Dimensions in millimeters Page 3 / 7

Decoflame Aps
Vang Mark 2
9380 Vestbjerg
Denmark
Tlf: +45 9630 4800




bestilling@decoflame.dk

Copyright of Decoflame ApS Denmark, whose property this document remains. No part thereof may be disclosed, copied, duplicated or in any other way made use of, except with the approval of Decoflame ApS Decoflame Denmark.

BLUETOOTH CODE:

REKV. NO. :


DELIVERY FROM WEEK:

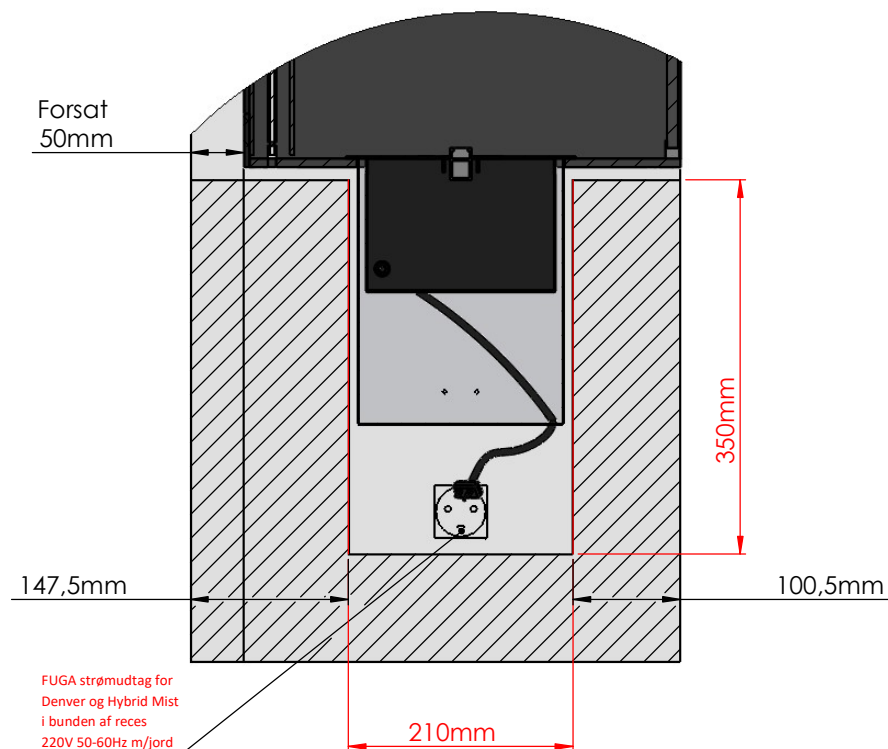

Vigtigt

Hullet i hulmuren skal være **210mm** og føres lodret min. **350mm** ned uden mørtelrester eller ujævnheder.

Derudover skal der anvendes et Fuga-strømudtag med jord til den elektriske tilslutning, iht. gældende standarder og sikker drift.

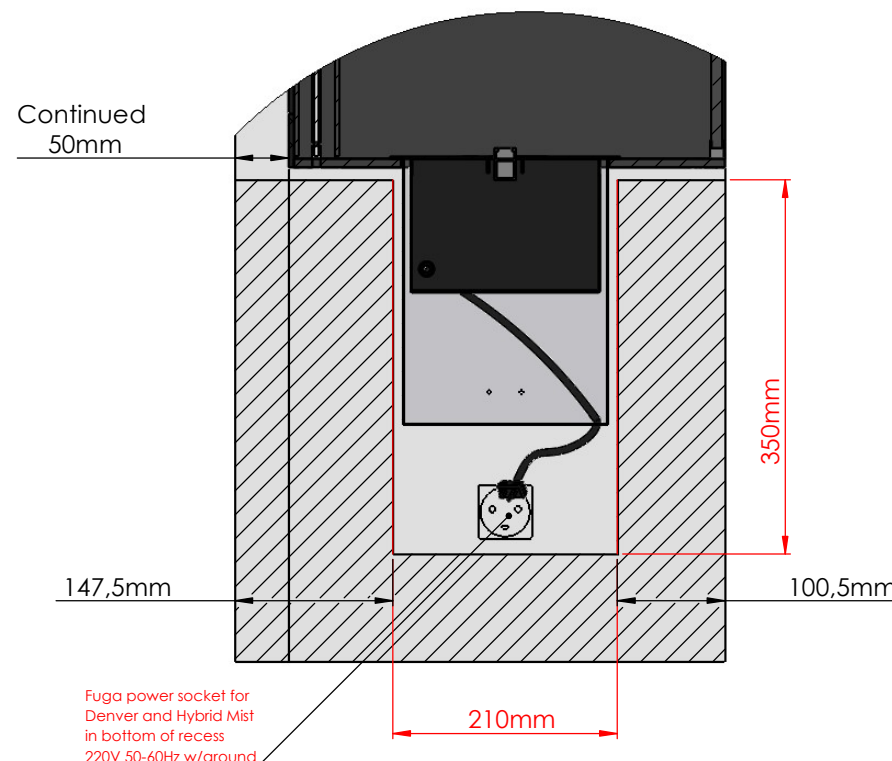

Important

The hole in the cavity wall must be **210mm** and go vertically down at least **350mm**, free from mortar residue or irregularities.

Additionally, a grounded Fuga power outlet must be used for the electrical connection to ensure the installation complies with current standards and operates safely.

DK - VARENR.
UK - ITEM NO.

53102

DK - Vigtigt

- Vi anbefaler at lave reces/udsparring i væg ned til gulvet = Fremtidssikret til alle Decoflame pejse.
- Hulsten må ikke bruges som øverste skift.

UK - Important

- We recommend to make the wall recess down to the floor. = future-proofed for all Decoflame fireplaces.
- The hollow stone must not be use as upper shift.

Dimensions in millimeters Page 4 / 7

Decoflame Aps
Vang Mark 2
9380 Vestbjerg
Denmark
Tlf: +45 9630 4800

decoflame

bestilling@decoflame.dk

Copyright of Decoflame Aps Denmark, whose property this document remains. No part thereof may be disclosed, copied, duplicated or in any other way made use of, except with the approval of Decoflame Aps Decoflame Denmark.



BLUETOOTH CODE:

REKV. NO. :

DELIVERY FROM WEEK:

DK - Pejs
(LxHxD) 1020x400x408mm

UK - Fireplace
(LxHxD) 1020x400x408mm

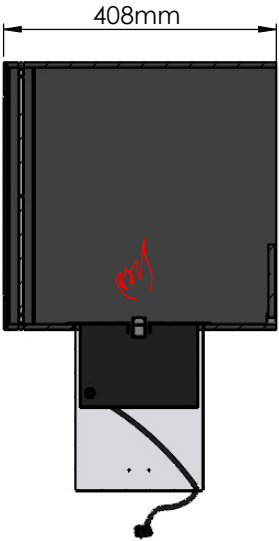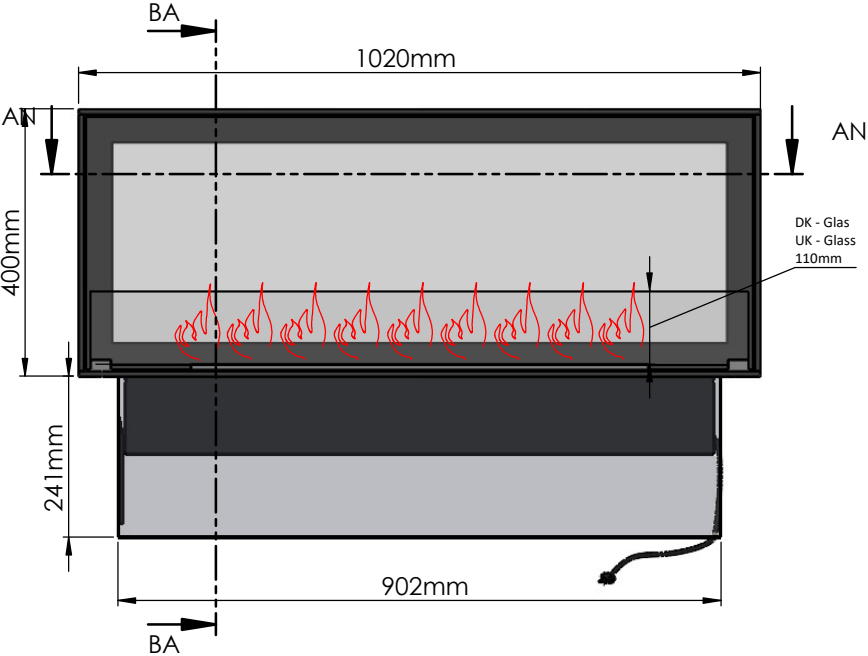

SECTION BA-BA
SCALE 1 : 8




SECTION AN-AN
SCALE 1 : 8

DK - VARENR.
UK - ITEM NO.

53102


DK - OBS. Glas
Der tages forbehold for glastolerancer
både i længde og højde på $\pm 2,5\text{mm}$
og i tykkelse på $\pm 0,3\text{mm}$
i henhold til DS/EN 12150

UK - ATTENTION Glass
Reservations are made for glass tolerances
both in length and height of $\pm 2.5\text{mm}$
and in thickness of $\pm 0.3\text{mm}$ according to
DS/EN 12150.

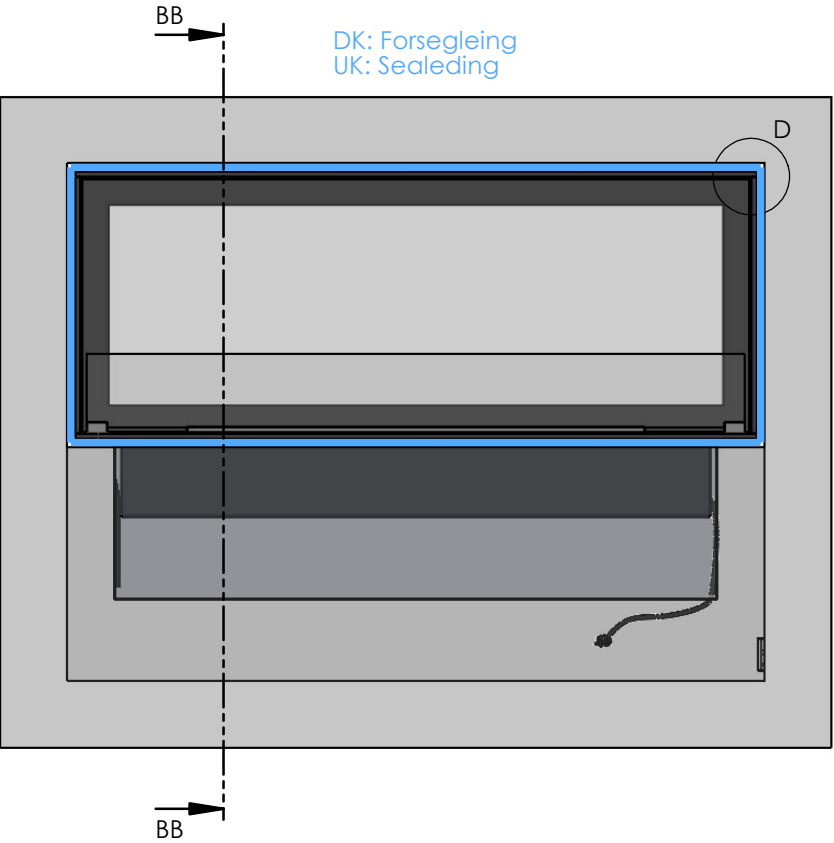


DK: Udenfor
UK: External

DK: Indenfor Se Note nedefor
UK: Internal see Note below

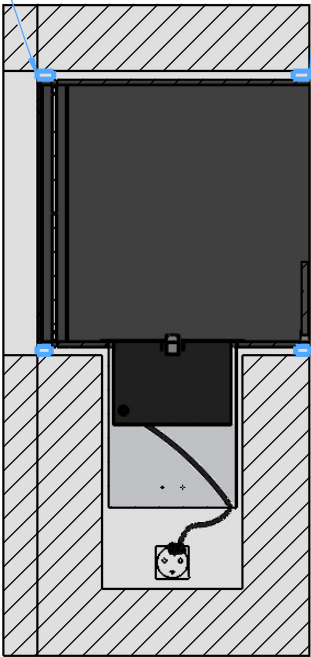


SECTION BB-BB
SCALE 1 : 8

DK - Pejs inkl. væg

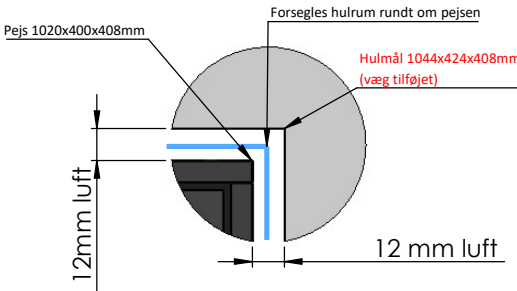


DK - View D
1:2

UK - Fireplace incl. wall

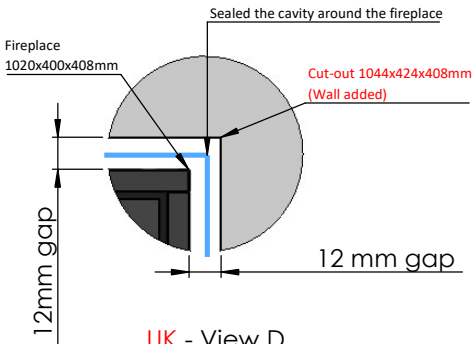

UK - View D
1:2

Note DK:
Ved montering af ramme på Montreal Clear anbefales det, at fugen trækkes 20 mm tilbage fra forkanten, da rammen har en indtrækning på 15 mm i området, hvor fugen ellers placeres.



Note UK:
When installing a frame on the Montreal Clear, it is recommended to set the sealant back by 20 mm from the front edge, as the frame extends 15 mm into the area where the sealant would otherwise be applied.

DK - VARENR.
UK - ITEM NO.

53102

DK eksempler på pejse

**Hullet omkring pejsen
forsegles eller fuges**

UK examples of fireplaces

**Seal the gap around the
fireplace**

Dimensions in millimeters Page 6 / 7

Decoflame Aps
Vang Mark 2
9380 Vestbjerg
Denmark
Tlf: +45 9630 4800




bestilling@decoflame.dk

Copyright of Decoflame Aps Denmark, whose property this document remains. No part thereof may be disclosed, copied, duplicated or in any other way made use of, except with the approval of Decoflame Aps Decoflame Denmark.

BLUETOOTH CODE:

REKV. NO. :

DELIVERY FROM WEEK:

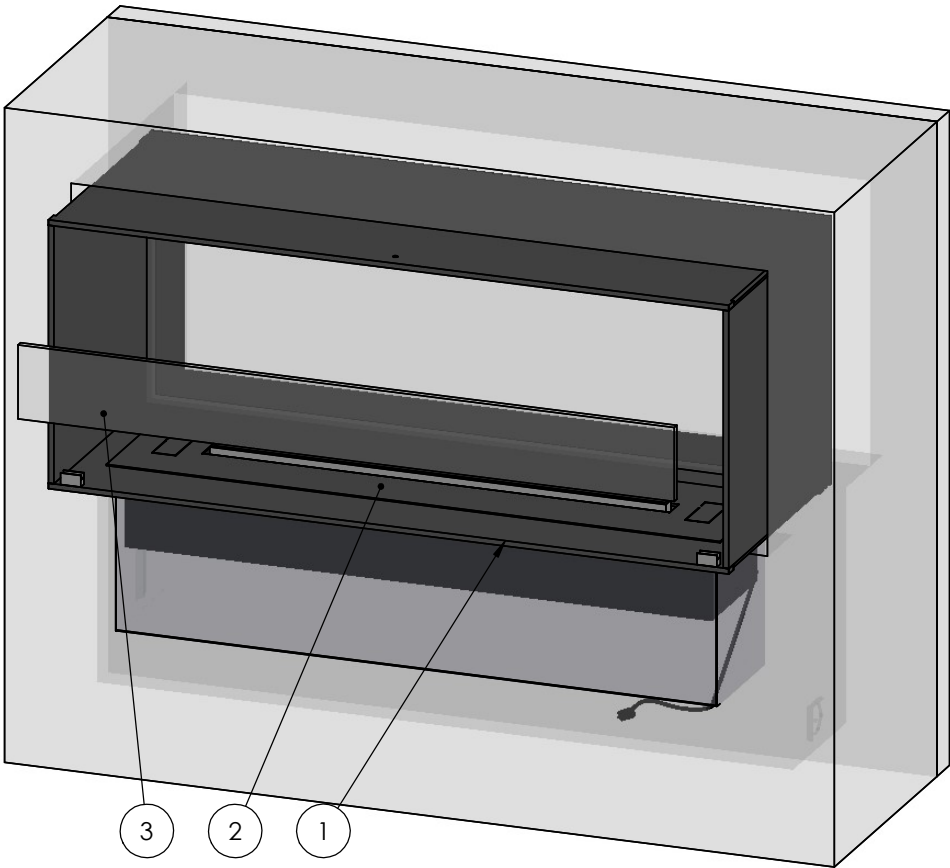

DK - Generelle vejledninger for “decoflame® biopejse lavet efter mål:

Hulmur (udskæring) = pejsen dimensioner + 24mm. Denne åbning må ikke forsegles el. fuges. Da hjørnerne af hulumuren forbliver synlige, er det vigtigt, at finishen er retvinklet og skarpkantet (af højeste kvalitet). Alle 4 hjørner skal være præcist 90°.

Vægge
Overflader inde i hulmur skal udføres i **ikke** brandbart materiale.

Vigtigt
Hullet i hulumuren skal være **210mm** og føres lodret min. **350mm** ned uden mørtelrester eller ujævnheder.

Derudover skal der anvendes et Fuga-strømuttag med jord til den elektriske tilslutning, iht. gældende standarder og sikker drift.

DK - Eksploderet view viser installationsproces.
1. PejSENS indsats skal placeres og centreres i hulmur. Brug egnet plugs og skruer afhængig af vægtypen.
2. PejSEN tilsluttes via stikkontakt (220V 50-60Hz m/jord) og nedsænkes forsigtigt i reces.
3. Slutteligt monteres glassene i glasholderne.

UK - General Guidelines for “decoflame® made-to-measure fireplaces”:

Wall (cut-out) = the fireplace dimensions + 24mm. This gap may not be sealed or grouted. As the edges of the cut-out remain visible it is important that they are made of the highest possible finish. All four corners of the cut-out must be exactly with an angle of 90 degrees.

Walls
All surfaces inside the wall cut-out are to be covered with **non** combustible material.

Important
The hole in the cavity wall must be **210mm** and go vertically down at least **350mm**, free from mortar residue or irregularities.

Additionally, a grounded Fuga power outlet must be used for the electrical connection to ensure the installation complies with current standards and operates safely.

UK - Exploded view showing the installation process.
1. The casing of the fireplace is centered in the wall cut-out. Use suited wall plugs depending on the type of wall.
2. The fireplace is plugged in the power outlet (220V 50-60Hz w/ground) and lowered into the recess.
3. Gently place the glass on the base plate pins.

DK - VARENR.
UK - ITEM NO.

53102

DK - Generelle vejledning
+ Eksploderet visning

UK - General guidelines
+ Exploded view

Dimensions in millimeters Page 7 / 7

DecoFlame Aps
Vang Mark 2
9380 Vestbjerg
Denmark
Tlf: +45 9630 4800
bestilling@decoflame.dk


Copyright of DecoFlame Aps Denmark, whose property this document remains. No part thereof may be disclosed, copied, duplicated or in any other way made use of, except with the approval of DecoFlame Aps DecoFlame Denmark.